Screw Dispenser

DEPRAG
machines unlimited

Advantages

- **Reliable processing**
- **Flexible**
- **Technical cleanliness**
- **Ergonomic**

DEPRAG Feeding Technology

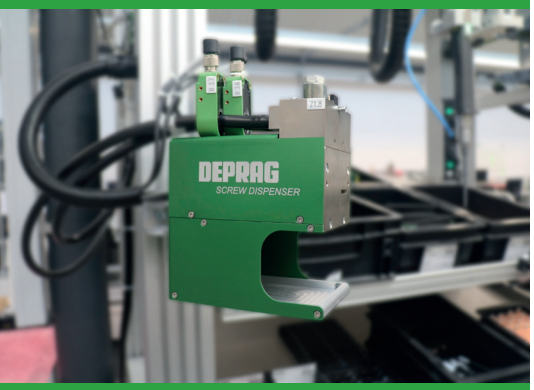

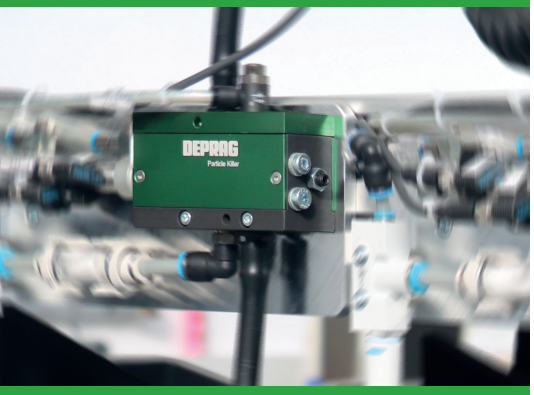

ADVANTAGES

Reliable processing

Minimises risk of error by supplying the correct number and type of screws.

Flexible

Can be combined with different DEPRAG feeding devices for the supply of up to three different screw types.

Technical cleanliness

In combination with the DEPRAG particle killer.

Ergonomic

Supplies the correct screw to point of use.

Technical data

Screw Dispenser	Type Part no.	SD-K12-L30-3 133000A	SD-K12-L60-3 133100A
Max. number of different screw types	pcs.	3	
Max. shaft length	mm	30	60
Max. head diameter	mm	12	
Operating voltage	Volt	24	
Operating pressure	bar	6	
Dimensions (WxHxL)	mm	100x214.1x234	100x212.1x319
Weight	kg	4.5	6.75

Customer-specific system designs are also available.
Please contact us to discuss the right solution for you!

Dimension sheet

Type SD-K12-L30-3

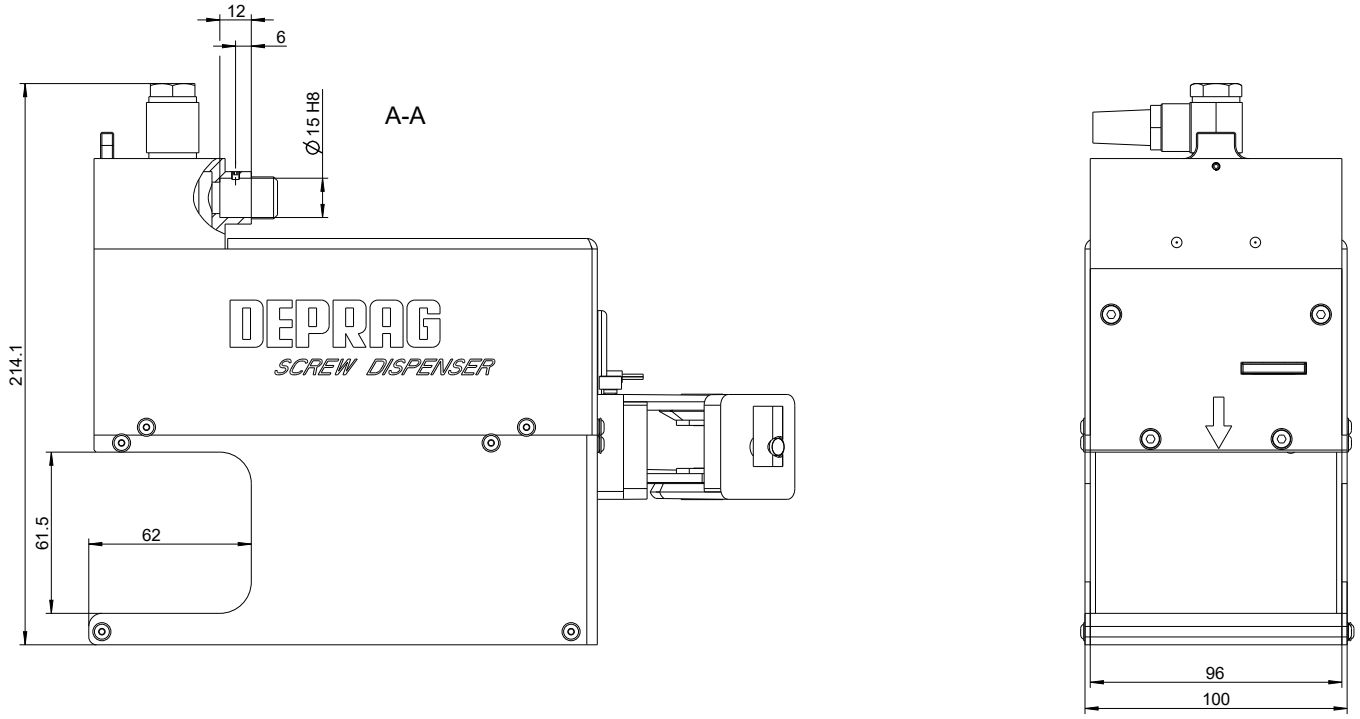

Type SD-K12-L60-3

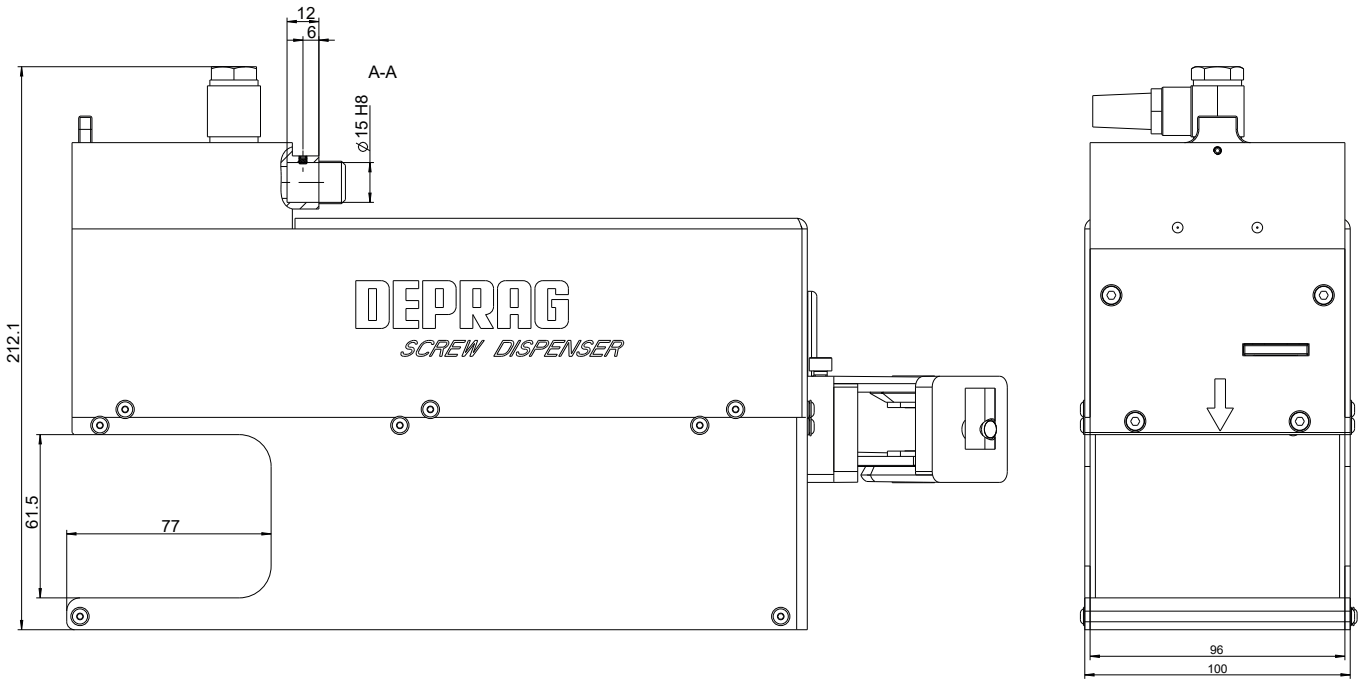

Complete system

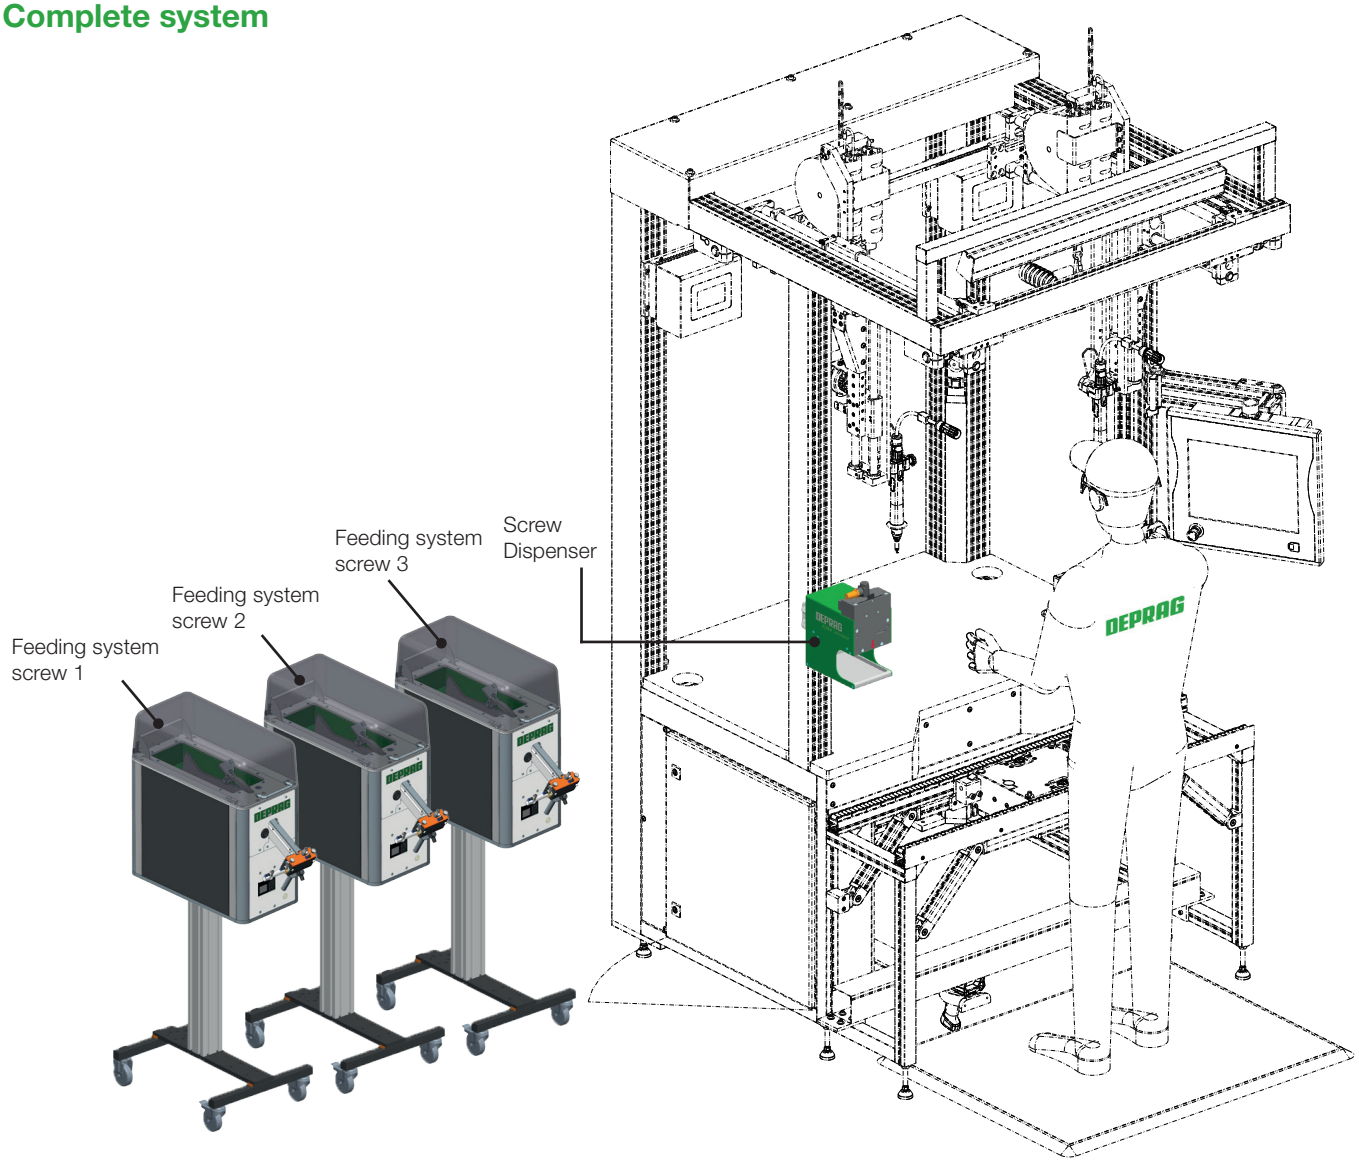

DEPRAG SCHULZ GMBH u. CO. KG
P.O. Box 1352 | D-92203 Amberg
Carl-Schulz-Platz 1 | D-92224 Amberg
Phone: +49 9621 371-0 | Fax: +49 9621 371-120
www.deprag.com | info@deprag.de

D0066E | 03.2025

© DEPRAG. All rights and technical alterations reserved – Fri